

Installation Instructions for the DS7430 Multiplex Expansion Module

1.0 General Information

The DS7430 is a Multiplex Expansion Module for use with the DS7400(Xi) Series Control/Communicator. It connects directly to the DS7400(Xi) and provides a two wire multiplex bus for the connection of up to 120 remote points.

- Current Draw: 65 mA-H Standby or Alarm.
- Outputs: DC Bus= 200 mA
Mux Bus= 75 mA

2.0 Installation

Warning: Failure to follow the mounting instructions in this manual may result in damage to the DS7400(Xi) Control Panel.



Caution: The DS7430 and DS7400(Xi) contain static sensitive components and must be handled with care. Follow anti-static procedures when handling the modules.

- Install the DS7430 board prior to installing the DS7400(Xi) board into the control enclosure. If the DS7400(Xi) board is already installed in the control enclosure, remove the 7400(Xi) board at this time.
- Place the DS7400(Xi) board on a flat surface with the component side of the board facing up.
- Install the four plastic standoffs in the holes provided in the DS7400(Xi) board. Avoid bending or flexing the DS7400(Xi) board when inserting the standoffs. Be sure the standoff tabs are aligned so that they do not touch any components on the module. Be sure that the stand-offs are firmly pressed into the board so that the "ears" can expand out. See drawings.
- Install the DS7430 board onto the standoffs, noting that the connector pins from the DS7400(Xi) are properly aligned to install into the connector on the DS7430. Avoid bending or flexing the boards while pressing them onto the standoffs.
- The DS7400(Xi) control board may be installed into the control panel enclosure at this time.



3.0 Wiring

Connect the multiplex loop to the DS7430 as shown. Up to 2000 feet (610 m) of #22 AWG (0.8 mm) or 5000 feet (1525 m) of #18 AWG (1.0 mm) wire may be used.

The Bus Power output is for connection of separately powered multiplex devices such as the DS7432 8 Input Remote Module. If using separate powered detectors, they should be powered from the auxiliary power terminals of the DS7400(Xi). The DS7432 may also be powered from the auxiliary terminals.

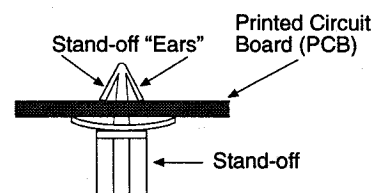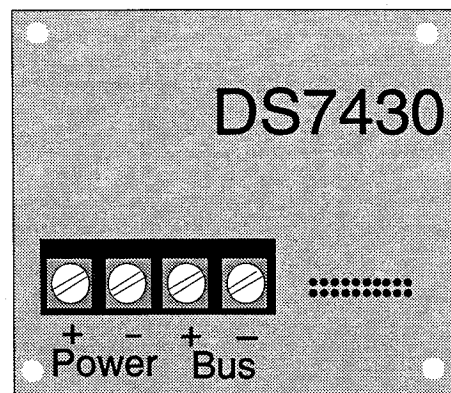

Be sure that the Stand-off is pressed firmly through the Printed Circuit Board, so that the Stand-off ears can expand outward.

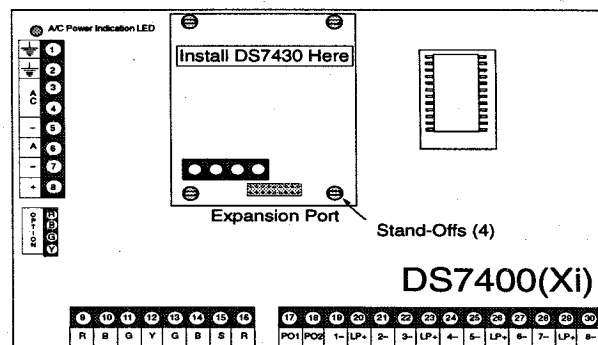

Detection Systems PTY Ltd.
Unit 21, 45 Gilby Road
Mount Waverley, Victoria 3149, Australia
61 3 9558 8088
Fax: 61 3 9558 8089

Detection Systems PTY Ltd.
Unit 2, The Riverside Centre
148 James Ruse Drive
Parramatta, NSW 2150, Australia
61 2 891 4944
Fax: 61 2 891 5844

Detection Systems Int'l Inc.
19, Rue du 19 Mars-78130
Les Mureaux, France
Phone/Fax: 33 1 34 74 9576

Detection Systems Ltd.
Unit 13-18, 17/F New Commerce Centre
19 On Sum Street, Shatin, N.T.
Hong Kong
852 2635 2815
Fax: 852 2648 7986

Detection Systems, Inc., 130 Perinton Parkway, Fairport, New York, USA 14450-9199
(716) 223-4060 • (800) 289-0096 • Fax: (716) 223-9180

